


PRODUCT SPECIFICATIONS: GENUS HIGH BULK - HIGH STIFFNESS

GSM	Caliper (micron)	Bulk (cc/gm)	Stiffness (gm.cm)		
			MD	CD	GM
Tappi T410	Tappi T411	-	Tappi T489		
250	320	1.28	85	40	58
285	370	1.30	130	52	82
300	396	1.32	137	63	93
320	429	1.34	160	74	109
350	480	1.37	187	81	123
400	548	1.37	300	136	202
450	622	1.38	364	162	243
Tolerance					
±3%	±5%		±15%		

Properties	Units	Value
Cobb T/B	g/m ²	<40/50
Roughness Bendtsen Type	Ml/min	<320 gsm >320 gsm
		60-70 60-80
IGT - Dry Pick	m/sec	>1
Plybond	J/m ²	>120
Gloss at 75°	%	>45
Brightness	%	>78
Moisture	%	<320 gsm >320 gsm
		6 -7 6.5-7.5

Testing conditions:
As per TAPPI 402/ISO standard
Testing Temperature: 23±1 °C
Relative Humidity: 50±2%

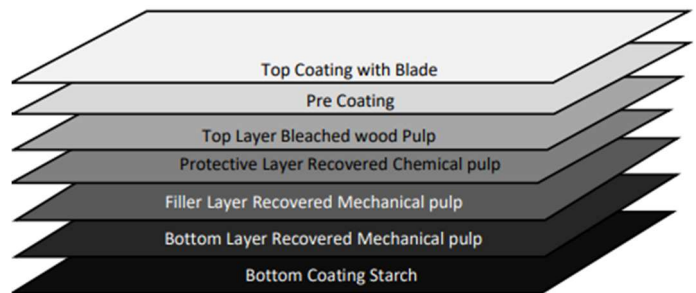

Packing Information		
Deckle (cm) Min: 324 Max:335 Reels Width : 560 - 1800 mm Core Inner Dia: 76mm/3" & 152mm/6"	Sheets Min Size: 500 x 560 mm Max Size: 1500 x 1600 mm	Pallets Min Height: Depend upon order qty Max Height: 1200 mm